

The SVR15 series is a 15" round vandal resistant fixture that can be mounted on the wall or ceiling designed to provide the extra level of protection and security required in high occupancy public areas. The housing can be mounted directly over a standard 4" outlet box or surface wired through ½" conduit entries. Suitable for wet locations, these lights are typically mounted 8 – 14 feet high.

Product Specifications

Housing:

Durable die cast aluminum with ½" threaded conduit entries for surface wiring. A continuous one piece gasket ensures a weather tight seal

Lens:

Clear Prismatic polycarbonate diffuser with UV inhibitors

Reflector:

Steel with reflective white paint

Socket:

Vertical mount Medium Base E26 – HID units

Lamps:*

Metal Halide 175W Max, High Pressure Sodium 150W Max and Compact Fluorescent 42W (PLT422)

Ballast:*

Multi-tap – 120, 208, 240, 277 Volts
Universal – 120~277 Volts



**VANDAL
RESISTANT**

Applications

- Parking Structures
- Schools
- Shopping Centers
- Correctional Facilities
- Parks and Swimming Pools Facilities
- Any Public Building

Finish:**

Dark bronze (BZ) powder paint finish is standard

Approvals:



UNDERWRITERS
LABORATORIES



Contact our engineering staff if you require further application information.

Part Number Listing


Part No.	Series Number	Lamps	Ballast
R800074	SVR15D-HPS150-MT-BZ	HPS150W	MT/60HZ
R800075	SVR15D-MH175PS-MT-BZ	MH175WPS	MT/60HZ PS
R800076	SVR15D-PLT422-UNV--BZ	PLT422	120 – 277 V

* Additional lamp wattages and ballast voltages are available. Contact factory for details.

** Other finishes are available. Please contact the factory for details.


Pulse Start units (when listed) meet or exceed the minimum efficiency requirements of the Energy Independence and Security Act of 2007 (EISA)

So that we may continue to supply the best possible product, specifications may change without notice. Consult the Paraflex website for the most up-to-date product information.

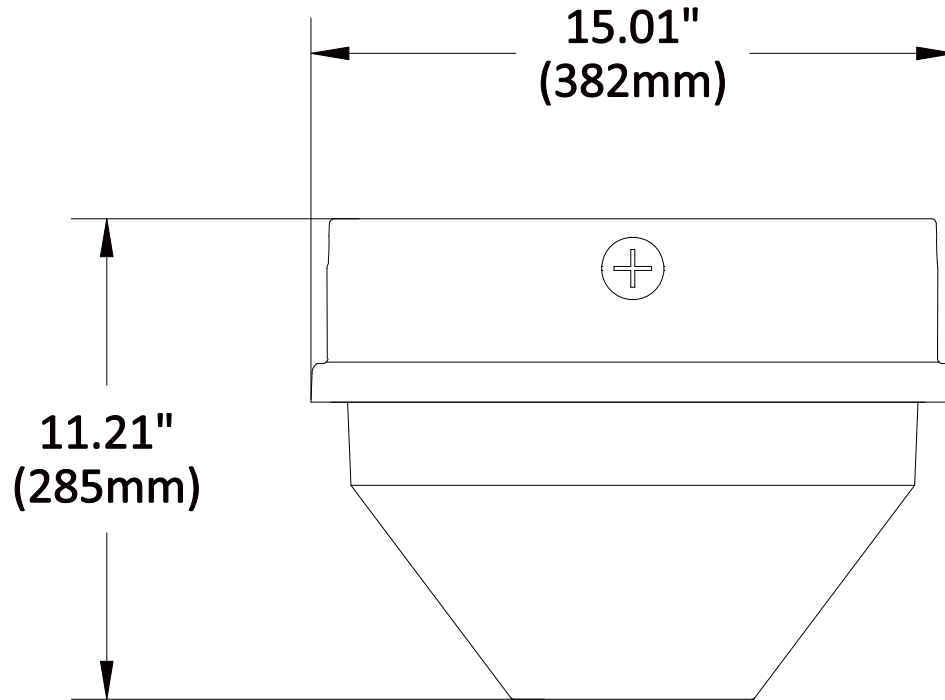

**VANDAL
RESISTANT**

Ø13.05"
(Ø332mm)

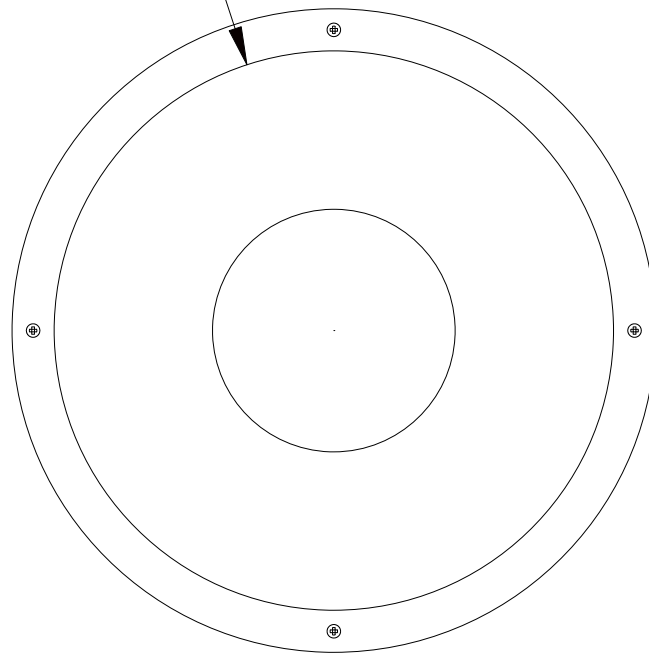

SVR15D